

# SIMPLE


## SELF CONTAINED

Keyless Entry®  
Access Control

Proprietary  
Piezoelectric  
Technology

Stainless Steel or  
Illuminated Black  
Lexan® Overlay

5 Year  
Warranty

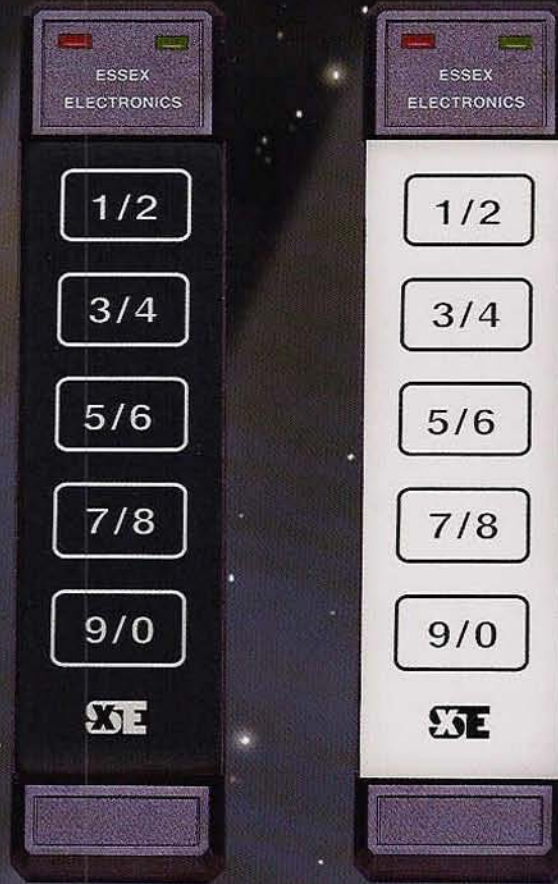

## SUPERIOR PERFORMANCE

Tested Over  
1 Billion Cycles

Weatherproof  
100% Relative  
Humidity

Durable Design  
Tolerates any  
Environment

No Moving Parts  
Nothing to Wear Out

## THE SKE-6 KEYLESS ENTRY® SYSTEM

- 6 Codes
- Remote Bypass
- Manual Latching
- Keypad Programmable
- 12-24V AC/DC Input/Output
- 1 SPDT Relay Output
- Two 1/4A Grounding Outputs
- Programmable Output Time
- 5 Year Warranty
- Made in the USA

The SKE-6 has been designed to provide reliable, cost effective access control for a variety of residential and small commercial applications. It utilizes Essex Billion Cycle Piezoelectric Switch Technology in a compact, integrated, self-contained Keypad.

**SKE** ESSEX  
ELECTRONICS  
INCORPORATED

1-800-KEYLESS  
keyless.com

## SKE-6 Features

- **6 Codes**  
1 Master Code, 5 User Codes
- **Variable Length Codes**  
3 to 8 digits
- **Easily Programmable at the Keypad**  
Add, Modify or Delete Codes from the Keypad
- **Tamper Alarm**  
Multiple incorrect entries trigger Tamper Alarm and lock out system for 30 seconds
- **Remote Bypass/Request to Exit (REX)**  
Activates Relay for Programmed Output Time
- **Anti-Tailgating**  
Helps prevent unauthorized access
- **Programmable Output Time**  
1 to 120 seconds
- **Manual Latching**  
Manually latch the Relay
- **Non – Volatile Memory**  
Retains codes during power interruption

## Output Capabilities

- **Single Door Access Control**  
The SKE-6 can control any Fail Safe or Fail Secure electric locking device.
- **Garage Door Controller/Electric Gate Operator**  
The SKE-6 can generate a Dry Contact output to control a Garage Door or an Electric Gate.
- **Other Equipment Control**  
The SKE-6 can provide a momentary output or manual control of an electronic device.

The SKE-6 also provides ¼A Grounding Outputs. Separate Relays are required to activate the following:

- **CCTV/External Light**  
The first key press triggers a 10 second output.
- **Doorbell**  
Press the **SE** position on the Keypad to trigger a momentary output.


## SKE-6 Specifications

- **Power Requirements**  
12 to 24V AC/DC
- **Current Draw**  
Standby: < 10mA  
Operation: 100mA max
- **Outputs**  
One SPDT Relay (2 amps at 24V max.)  
Voltage or Dry Contact  
Fail Safe or Fail Secure  
Two ¼A Grounding Outputs
- **Keypad Switch Life**  
> 1 Billion Cycles
- **Keypad Operating Environment**  
- 40°C to + 70°C (- 40°F to + 160°F)  
100% Relative Humidity
- **Keypad Styles/Dimensions**



### **SKE-6LI**

Style: Black Illuminated Overlay  
Dimensions: H: 7 ⅛" x W: 1 ¾" x D: ¾"  
(18.1 x 4.4 x 1.9 cm)



### **SKE-6SN**

Style: Stainless Steel Overlay  
Dimensions: H: 7 ⅛" x W: 1 ¾" x D: ¾"  
(18.1 x 4.4 x 1.9 cm)

The SKE-6 includes a Keypad and a 12 inch (30.5 cm) wiring harness.